
SL & SL-316 DUMP BODIES



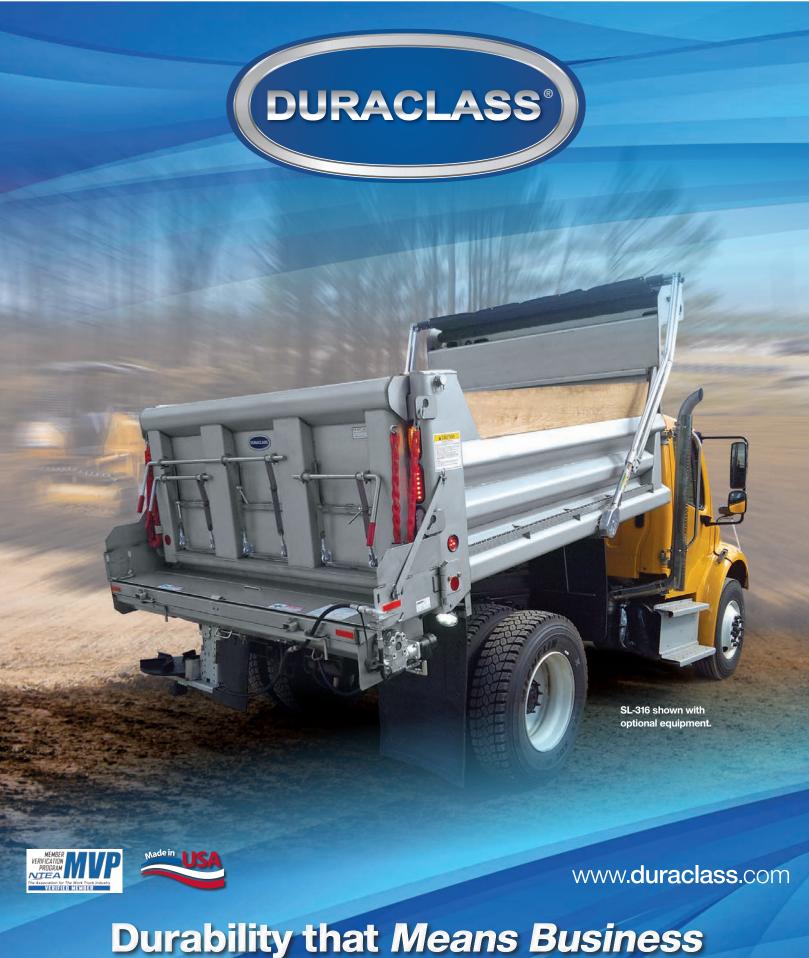


SL & SL-316 STANDARD OPTIONS

- Fully enclosed front posts & Full depth rear corner posts
- SL: 3/6" or 1/4" AR in lieu of 10 ga SL-316: 3/16" or 1/4" AR in lieu of 10 ga
- · Cabshields:
 - ° 1/4 size, 1/4 size with window, ½ size, ½ size with window and full size
- Wind Deflector for Tarp Available for All Sizes
- Side Braces Vertical; One Horizontal Side Brace; Two Horizontal Side Braces
- Standard Tailgate Brace Options
 - ° SL: Straight Tailgate Assembly with Vertical Braces
 - ° SL-316: Straight Tailgate Assembly with Horizontal Braces
- Straight or Sloped Tailgates
- 8", 10" or 12" Spill Apron
- · Sloped Sides

ADDITIONAL BODY OPTIONS

- Elliptical Body Design
- Telescopic Hoist
- Aluminum (Cab Shields & Tailgates Only)
- Quick Release Upper Tailgate Pins
- Hi-Lift Tailgate, Air or Hydraulic
- Side Swing Tailgate (36" minimum)
- Body Side Steps and Handles
- · Tarp Rails and Walk Rails
- · Variety of Sliding Door Options
- · Custom Side and Tailgate Heights
- · Custom Body Bracing
- Air Operated Hoist Controls



Crossmemberless understructure.



Premium Steel Construction-Minimum 45,000 psi. Additional steel and stainless steel options available.

SL & SL-316 DUMP BODY SPECIFICATIONS				
Model Name	SL	SL	SL-316	SL-316
Inside Length	10'	10'	10'	10'
Width	7'	7'	7'	7'
Body Capacity, yards	5-6	6-8	5-7	6-8
Material	10 ga	10 ga	3/16" floor & rear; 10 ga sides and front	
Side/Front/Rear Height, inches	24/30/30	28/38/38	24/34/34	28/38/38
Hoist Model	1821	1821	1821 PL	1821 PL
Weight (Includes Hoist), lbs*	3062	3206	3845	3970

^{*} Weight is less oil and PTO

All bodies shown with some optional equipment. Models and options are subject to change without notice.



P.O. Box 49 1425 Highway 25 North Tishomingo, MS 38873 800.255.4345 Fax: 800.728.4345 www.duraclass.com

CONTACT YOUR DISTRIBUTOR